

# Turbine Vibrators


## FEATURES:

- No lubrication required.
- Low noise level.  
*62-78 dBA well below OSHA standards.*
- Durable finish  
*anodized aluminum (standard) or painted.*
- Muffler standard.
- Precise control of force and speed with use of optional speed muffler.
- Lower air consumption than comparable air vibrator.
- Direct interchange with competitors' models.  
*Contact Cougar for chart.*
- Excellent power to weight ratio.
- 350° F temperature rating.

## Specify Cougar for:

- Cost effective solutions.
- Expert technical assistance.
- Complete service and support.

*For the specifications on Turbine Vibrators see technical bulletin TB-ATU-001a (Inch), TB-ATU-001b (Metric).*

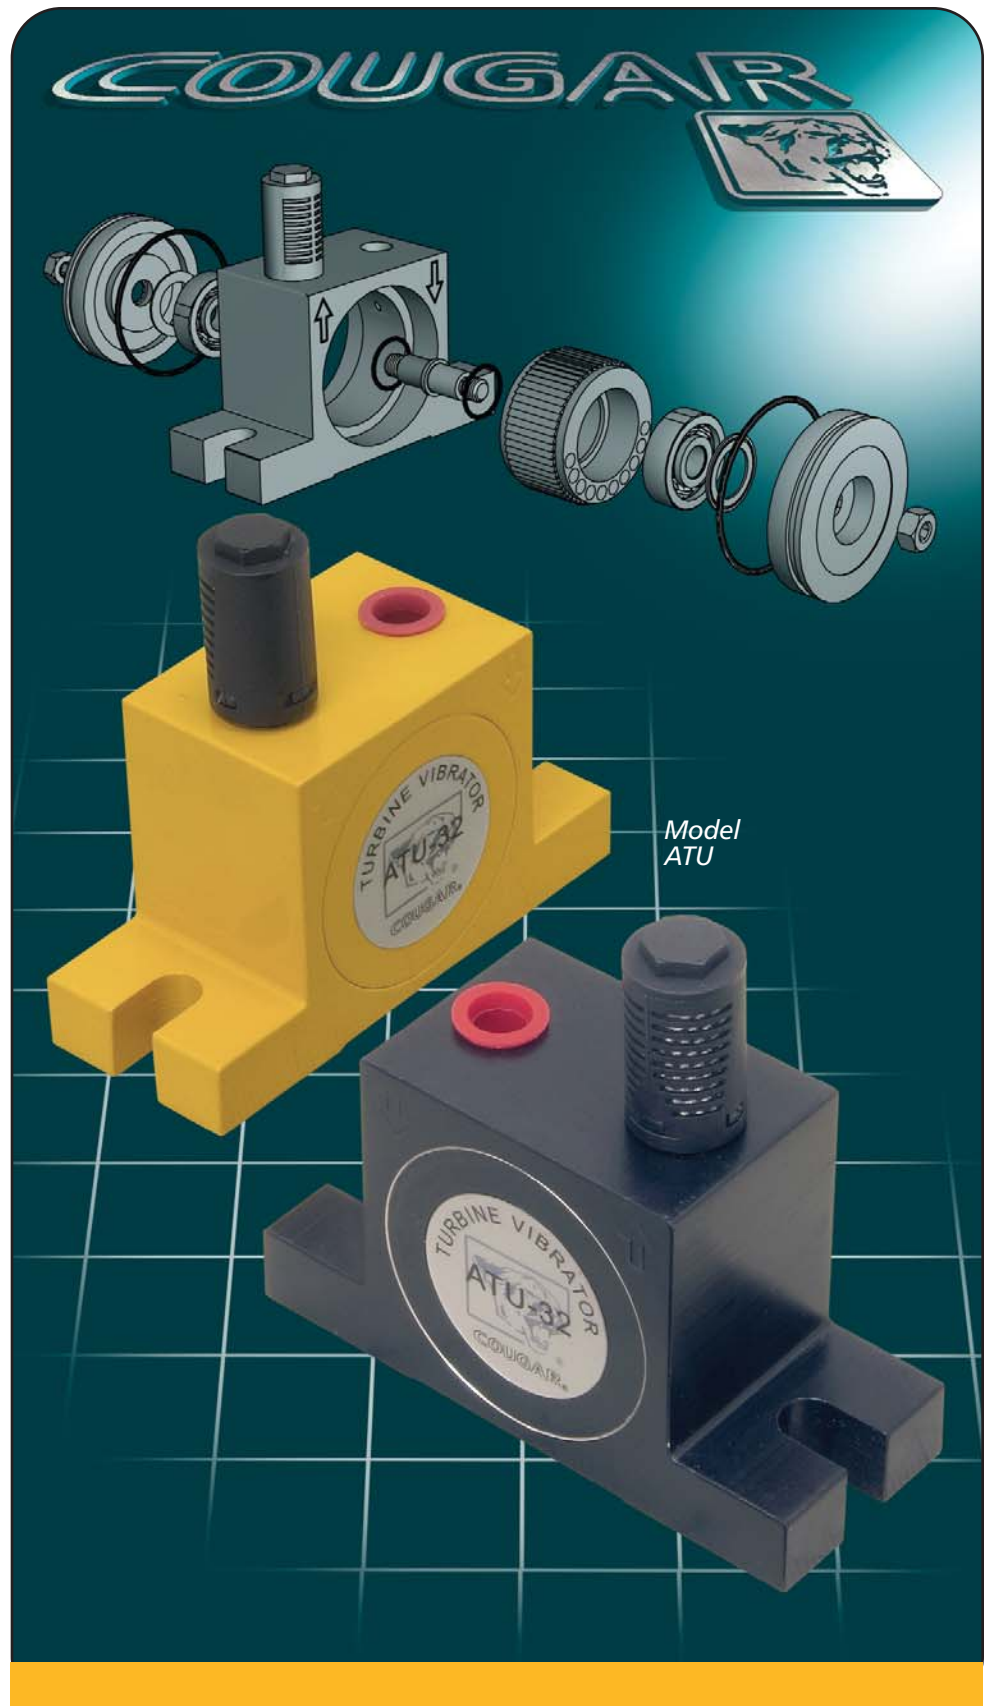

**COUGAR**<sup>®</sup>  
INDUSTRIES, INC.

3600 Cougar Drive,  
Peru, Illinois 61354-9336

[www.cougarindustries.com](http://www.cougarindustries.com)

Toll Free: 800-262-2106  
Phone: 815-224-1200  
Fax: 815-224-1241

Form SB-ATU-001